

Technical Datasheet

Paperless Recorder

WX-PR9000 Series

Model: PR 800/1600/2400/3200



WellKonix Process Automation & Technologies Co.

1.9883 St. John's Road
LEICESTER
LE8 2RB
England

12, Brzozowa
Warsaw West County
Masovian Voivodeship
05-850
Poland

2, Venture Drive,
11-30, Vision Exchange,
Singapore.

WX-PR9000 Series

WX-PR800/PR1600/PR3200 is featured with outstanding performance and easy operating Function along with high visibility Color LCD display, universal inputs with high speed of sampling rate and accuracy. Measured data is stored into memory and can be analyzed on PC through communication.

Basic Functions

- Up to 48 channels of universal input
- UP to 18 Alarm Output Relays
- With 24V Power distribution Output
- Communication type: RS485, RS232C.
- With a USB data transfer interface



Display & Operation

- Multiple display Function : choose the display your way
- Use date and time calendar search functions to Review historical data .
- 7 inch high brightness color graphics and color LCD (800 * 480pixels)

Reliability and Security

- Dust- and splash-proof front panel
- Power Fail Safeguard: All the data stored in Flash memory, make sure that all the historical data and configuration parameters will not lost when power fail. Real time clock power supply by lithium batteries.

Data Acquisition Software

- Software for varieties of tasks:analysis, settings, and acquisition

Power supply

- Voltage Range : AC 85 ~ 264 V (power supply of the switches), 50/60 Hz;
DC12 ~ 36 V (power supply of the switches);

Normal operating condition


- Temperature : -10 ~ 50°C Humidity : 10 ~ 90%%RH (without condensation of moisture)

Technical Specification


| Input measurement | |
|--------------------------|---|
| Input signal | Current: 0 ~ 20 mA, 0 ~ 10 mA, 4 ~ 20 mA, 0 ~ 10 mA SQRT, 4 ~ 20 Ma SQRT Voltage: 0 ~ 5 V, 1 ~ 5 V, 0 ~ 10 V, ±5 V, 0 ~ 5 V SQRT, 1 ~ 5 V SQRT, 0 ~ 20 mV, 0 ~ 100 mV, ±20 mV, ±100 mV Thermal resistance: Pt100, Cu50, Cu53, Cu100, BA1, BA2 Linear resistance: 0 ~ 400 Ω Thermocouple: B, S, K, E, T, J, R, N, F2, Wre3-25, Wre5-26 |
| Output | |
| Output signal | Analog output: 4 ~ 20 mA (load resistance ≤ 380 Ω), 0 ~ 20 mA (load resistance ≤ 380 Ω), 0 ~ 10 mA (load resistance ≤ 760 Ω), 1 ~ 5 V (load resistance ≥ 250 KΩ), 0 ~ 5 V (load resistance ≥ 250 KΩ), 0 ~ 10 V (load resistance ≥ 10 KΩ) Alarm output: normally open relay contact output, where the contact capacity is 1 A/250 VAC (resistive load) (! Note: Please do not carry load directly in case the load exceeds the contact capacity of relay.) Feed output: DC24 V ± 1, load current ≤ 250 mA Communication output: RS485/RS232 communication interface, 1,200 ~ 57,600 bps baud rate (able to be set); standard MODBUS RTU communication protocol is adopted; the communication distance of RS-485 can be as long as 1 kilometer; the communication distance of RS-232 can be as long as 15 m; Ethernet communication interface is adopted, where the communication speed is 10 M. |
| Comprehensive parameters | |
| Measurement accuracy | 0.2% FS ± 1 d |
| Sampling period | 1 s |
| Setting mode | The button is set in the form of panel soft touch; set values of parameters are locked with passwords and will be saved permanently in case of outage. |
| Display method | 7-inch 800 * 480 dot-matrix widescreen TFT high brightness color graphics and LCD display; LED backlight; with clear pictures and wide visual angle. Display contents can be composed of characters, figures, conditional curves, bar graphs, etc.; through panel button, page turning, forward and backward search of historical data, time scale change of curves, etc. can be realized. |
| Data backup | Data backup and conversion storage of USB flash disk and SD card are support, where the maximum capacity is 8 GB; FAT and FAT32 formats are supported. |
| Storage capacity | The capacity of the internal Flash memory is 64 MByte. |
| Recording interval | Nine options including 1, 2, 4, 6, 15, 30, 60, 120 and 240 s can be selected. |

Display


1. Real-time Curve

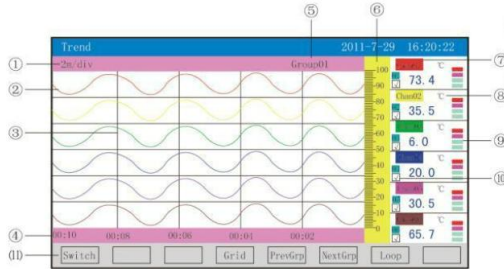

2. Real-time control

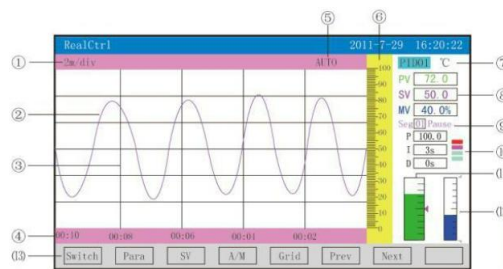


3. Bar Graph

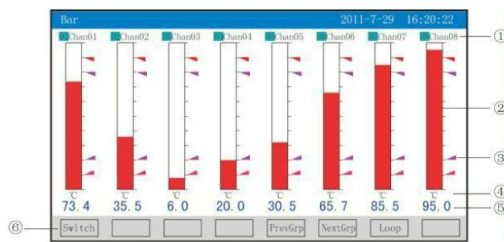

4. Digital Display



5. Historical Curve

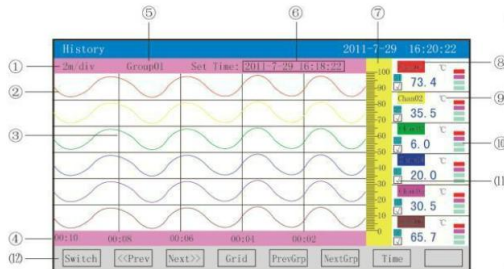

6. Alarm List

The Alarm List display shows a table of alarm events. The top bar indicates the date and time: 2011-7-29 16:20:22. The table has columns for No., Chan, Name, Alarm Time, and Clear Time. The bottom navigation bar includes buttons for Switch, Up, Down, PgUp, and PgDn.

| No. | Chan | Name | Alarm Time | Clear Time | Type |
|-----|------|--------|--------------------|--------------------|------|
| 015 | 01 | Chan01 | 2011-7-29 16:09:22 | 2011-7-29 16:09:22 | HI |
| 012 | 01 | Chan01 | 2011-7-29 16:01:22 | 2011-7-29 16:01:22 | HI |
| 011 | 01 | Chan01 | 2011-7-29 16:02:22 | 2011-7-29 16:02:22 | HI |
| 010 | 01 | Chan01 | 2011-7-29 16:03:22 | 2011-7-29 16:03:22 | HI |
| 009 | 01 | Chan01 | 2011-7-29 16:01:22 | 2011-7-29 16:01:22 | HI |
| 008 | 01 | Chan01 | 2011-7-29 16:05:22 | 2011-7-29 16:05:22 | HI |
| 007 | 01 | Chan01 | 2011-7-29 16:06:22 | 2011-7-29 16:06:22 | HI |
| 006 | 01 | Chan01 | 2011-7-29 16:07:22 | 2011-7-29 16:07:22 | HI |
| 005 | 01 | Chan01 | 2011-7-29 16:08:22 | 2011-7-29 16:08:22 | HI |
| 004 | 01 | Chan01 | 2011-7-29 16:09:22 | 2011-7-29 16:09:22 | HI |
| 003 | 01 | Chan01 | 2011-7-29 16:10:22 | 2011-7-29 16:10:22 | HI |
| 002 | 01 | Chan01 | 2011-7-29 16:11:22 | 2011-7-29 16:11:22 | HI |
| 001 | 01 | Chan01 | 2011-7-29 16:12:22 | 2011-7-29 16:12:22 | HI |

7. File List

The File List display shows a table of file records. The top bar indicates the date and time: 2011-7-29 16:20:22. The table has columns for No., Start Time, End Time, Int, Cond, and Status. The bottom navigation bar includes buttons for Switch, Up, Down, PgUp, PgDn, Curve, and Backup.

| No. | Start Time | End Time | Int | Cond | Status |
|-----|--------------------|--------------------|-----|------|------------|
| 006 | 2011-7-29 15:30:10 | 2011-7-29 15:30:10 | IS | Per | Alarm stop |
| 005 | 2011-7-29 15:30:10 | 2011-7-29 15:30:30 | IS | Per | Poff stop |
| 004 | 2011-7-29 15:29:40 | 2011-7-29 15:30:00 | IS | Per | Min stop |
| 003 | 2011-7-29 15:29:10 | 2011-7-29 15:29:30 | IS | Per | Poff stop |
| 002 | 2011-7-29 15:28:40 | 2011-7-29 15:29:00 | IS | Per | Alarm stop |
| 001 | 2011-7-29 15:28:10 | 2011-7-29 15:28:30 | IS | Per | Poff stop |

8. Menu for Printing

The Menu for Printing display shows a form for printing data. The top bar indicates the date and time: 2011-7-29 16:20:22. The form has fields for Print (RealData), File No. (001), Start Time (2011-7-29 16:10:22), End Time (2011-7-29 16:20:22), Channel (Chan01), and Interval (001). The bottom navigation bar includes buttons for Switch, Down, Up, PrData, PrCurve, and Enter.

Storage Function

| | |
|---|---|
| Data backup | Data backup and conversion storage of USB flash disk and SD card are support, where the maximum capacity is 8 GB; FAT and FAT32 formats are supported. |
| Storage capacity | The capacity of the internal Flash memory is 64 MByte. |
| Recording interval | Nine options including 1, 2, 4, 6, 15, 30, 60, 120 and 240 s can be selected. |
| Storage length (continuous record without power-off) | 24 days (1 s interval)– 5825 days (240 s interval) Calculation formula: recorded time (day) $\frac{64 * 1,024 * 1,024 * \text{recording interval (S)}}{\text{channel number} * 2 * 24 * 3,600}$ = (! Note: For calculation of channel number, the program divides the channel number into five options, namely 4, 8, 16, 32 and 64, and the bigger figure should be regarded as the channel number for calculation in case the channel number of the instrument is between the said two options. For example: If the channel number of the instrument is 12, then 16 should be adopted in the formula.) |

Alarm Output Function

Max 18 channel alarm output, normally open relay contact output, where the contact capacity is 1 A/250 VAC (resistive load)

(! Note: Please do not carry load directly in case the load exceeds the contact capacity of relay.)

Communication Function

RS485/RS232 communication interface, 1,200 ~ 57,600 bps baud rate (able to be set); standard MODBUS RTU communication protocol is adopted;

Ordering code

| WX-PR800/PR1600/PR2400/PR3200 Paperless recorder | | | | | | | | |
|--|------|----|----|----|----|----|---|-------------------------|
| Model | Form | | | | | | | Specification |
| WX-PR | 60 | _C | _ | _ | _ | _ | _ | No. |
| | | 2 | | | | | | 2 channel input |
| | | 4 | | | | | | 4 channel input |
| | | : | | | | | | : |
| | | 48 | | | | | | 48 channel input |
| Alarm output | | | 0 | | | | | None |
| | | | 2 | | | | | 2 channel alarm output |
| | | | 4 | | | | | 4 channel alarm output |
| | | | : | | | | | : |
| | | | 18 | | | | | 18 channel alarm output |
| Communication | | | | T0 | | | | None |
| | | | | T1 | | | | RS-232 |
| | | | | T2 | | | | RS-485 |
| Power distribution | | | | | P0 | | | None |
| | | | | | P1 | | | 1 channel |
| Analog output | | | | | | A0 | | None |
| | | | | | | A1 | | 1 channel analog output |
| | | | | | | A2 | | 2 channel analog output |
| | | | | | | A4 | | 4 channel analog output |
| USB connection | | | | | | | 0 | None |
| | | | | | | | 1 | Yes |
| Power supply | | | | | | | A | AC85~264V |
| | | | | | | | D | DC12~36V |

Note: Total number of analog output and alarm output channels is less than 18